

Diaphragm seals flanged types

Model DF20

ASME B40.100

Features

- Metal diaphragms with Teflon gasket
- Removable top and bottom housing
- Variety of wetted parts materials

Pressure rating

From 150 lbs up to 1500 lbs

From PN10 up to PN100

Applications

Chemical and petrochemical industry

Machine and apparatus construction

Offshore installations


Pulp and paper industry

Waste water treatment



Technical specification	DF20	
Process connection size, flanged		
ASME B16.5	ANSI	1/2", 3/4", 1", 1 1/2", 2", 3"
EN 1092-1	DIN	DN15, DN25, DN40, DN50, DN80, others on request
Rating	ANSI	150 lbs, 300 lbs, 600 lbs, 900 lbs, 1500 lbs
	DIN	PN10, PN16, PN25, PN40, PN64, PN100, others on request
Construction		Bolted top and bottom housing, removable for easy maintenance
Fill port		At the side with stainless steel ball and set screw
Flushing connection		Optional flushing
Flushing connection size		1/4" 1/2" NPT female
Maximum pressure		
Metal bottom housing [psi / bar]		1500 / 100
Other bottom housing [psi / bar]		150 / 10
Measuring principle		Diaphragm welded to top housing
Instrument connections [female]		3/8" BSP, 1/2" NPT, others on request
Material (wetted parts)		
Bottom housing		Stainless steel 316, 316L, 316 with teflon protection, polypropylene, PVC
Diaphragm (metal type)		Stainless steel 316L
Diaphragm (other types)		Stainless steel 316L with teflon protection
Material (non wetted parts)		
Top housing		Stainless steel 304, 316
Clamp rings		Steel painted black, optional stainless steel
Bolts and nuts		Stainless steel 300 series
Accuracy		Additional 0,5 % to the specified tolerance of the mounted instrument
Filling liquids (temperature range)		Glycerin (0/400 °F, -18/204 °C), Silicone (-40/600 °F, -40/315 °C), Halocarbon (-70/300 °F, -56/149 °C), Syltherm 800 (-40/750 °F, -40/400 °C), Vegetable oil (32/248 °F, 0/120 °C), Food grade silicone (-13/400 °F, -25/200 °C), Others on request, also depending on selected material and configuration.
Mounting		Direct or with capillary
Accessories, options		NACE, pressure gauges, pressure switches, transducers, capillaries

General dimensions in mm

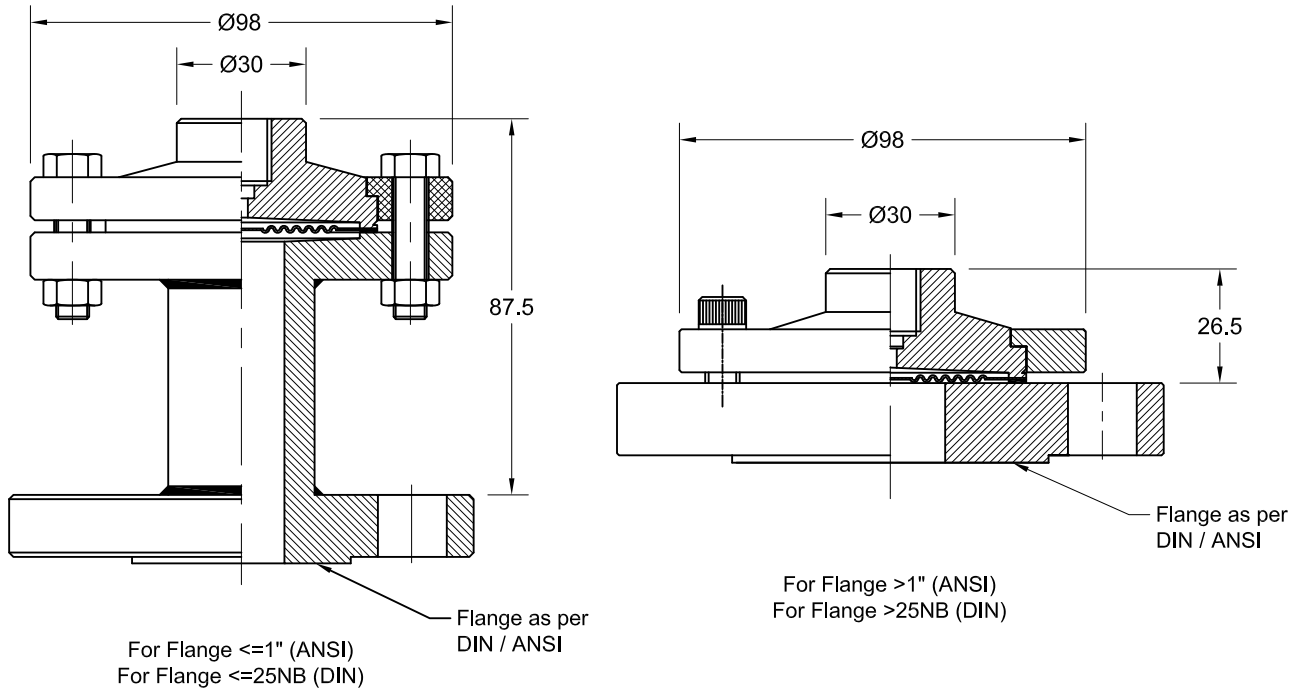

Order information

Process connection	Type	Diaphragm	Bottom housing material	Instrument connection	Rating	Flange facing	Filling fluid	Options
ANSI Flanged	DF20	(S) 316L	(S) 316	(14T) 3/8 BSP(F)	ANSI	(FF) Flat face ²⁾	(CG) Glycerin (direct mounted, -18/204 °C)	(NH) Tagging wired
(05) 1/2"		(SP) 316L with teflon protection ¹⁾	(L) 316L	(04T) 1/2" NPT(F)	(150) 150 lbs	(RF) Raised face ²⁾	(CK) Silicone (direct mounted or with capillary, -40/315 °C)	(OF) Oil free (only filled with halocarbon)
(07) 3/4"		(SJ) 316L with teflon Coating ¹⁾	(SP) 316 with teflon lined ¹⁾		(600) 600 lbs	(RTJ) Ring joint type ²⁾	(CF) Halocarbon (direct mounted or with capillary, -56/149 °C)	(YT) Stainless steel 316 top housing
(10) 1"			(PP) Polypropylene ³⁾		(900) 900 lbs		(HA) Syltherm 800 (direct mounted or with capillary, -40/400 °C)	(SE) Stainless steel clamp rings
(15) 1 1/2"		(H) Hastelloy C	(V) PVC ³⁾		(1500) 1500 lbs		(GZ) Vegetable oil (direct mounted or with capillary, 0/120 °C)	(SR4) Spacer ring with 1/2" NPT flushing ⁵⁾
(20) 2"							(CZ) Food grade silicone (direct mounted or with capillary, -25/200 °C)	(SR2) Spacer ring with 1/4" NPT flushing ⁵⁾
(30) 3"								(CA) Stainless steel armored capillary ⁴⁾
DIN Flanged						DIN		(CP) Stainless steel armored capillary with PVC sleeving ⁴⁾
(DN15)						(PN10)		
(DN25)						(PN16)		
(DN40)					(PN25)			
(DN50)					(PN40)			
(DN80)					(PN64)			
					(PN100)			
					others on request		others on request	

1) Restricted to maximum temperature 200 °C, not available with option SR2, SR4 2) The DIN-flange facing depends on nominal size and nominal pressure
3) Only 1/4 and 1/2 NPT, max. Rating/temp. limit: 200 psi / 14 bar at 74 °F / 23 °C; 125 psi / 8.6 bar at 125 °F / 52 °C; 80 psi / 5.5 bar at 150 °F / 65 °C
5) Not for (SP), (PP)& (V)

How to order

Process connection	Type	Diaphragm capsule material	Bottom housing material	Instrument connection	Filling fluid	Option
04	DF20	S	S	14T	CK	CA1.0

Precision Mass Products Pvt. Ltd.

Plot No.: 2306, G.I.D.C. Chhatral, Ta: Kalol, Dist.: Gandhinagar, Chhatral -382729, Gujarat, India.

Telephone: +91-2764 233681/82/83

Email: sales@precisionmass.com

Fax: +91-2764-233440

www.precisionmass.com

- North Zone : sales.delhi@precisionmass.com
- East zone : sales.kolkata@precisionmass.com
- West zone : sales.mumbai@precisionmass.com
- South zone : sales.chennai@precisionmass.com