

Single Jet Water Meter



Features:

- Dry-dial, magnetic drive, protected against external magnetic tempering.
- Dry register and register with 5 or 8 numbered rollers
- Vacuum-sealed register, frost resistant, keeps clear reading for long time
- Brass body or plastic body, optional
- Brass body can be painted or nickel coated
- High accuracy.
- Measuring units is m³
- The meter conforms to ISO4064 Standard Class B


Working Condition:

- Water temperature $\leq 45^{\circ}\text{C}$, Hot water meter $\leq 90^{\circ}\text{C}$
- Water pressure $\leq 1\text{ MPa}$ (PN 1.6 MPa/16 bar)

Belanto Water Meters



Main Technical Data:

Normal Size DN(mm)	Class of measurement	Overload Flow-rate $q_s(m^3/h)$	Permanent flow-rate $q_p(m^3/h)$	Transitional flow-rate $q_t(l/h)$	Minimum flow-rate $q_{min}(l/h)$
15	B	3	1.5	120	30
20	B	5	2.5	200	50

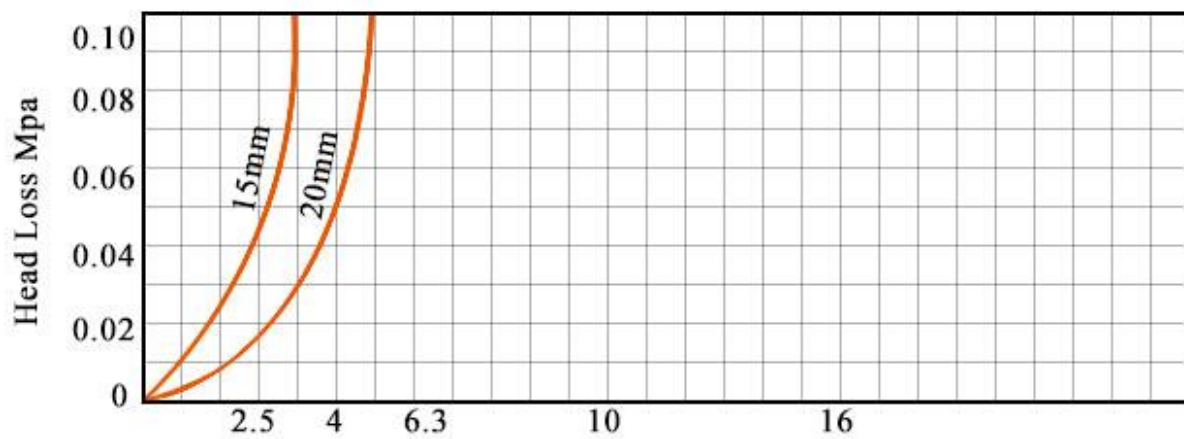

Belanto Water Meters

Dimension:

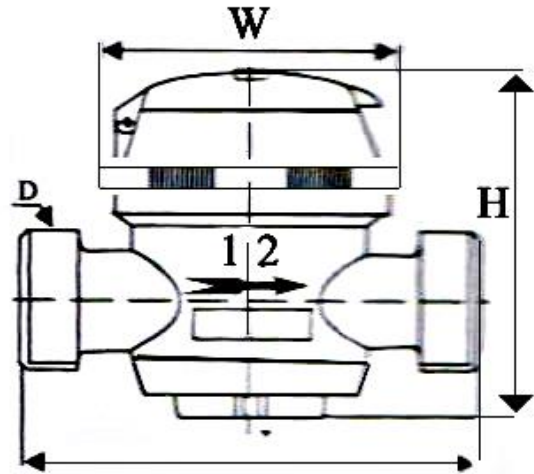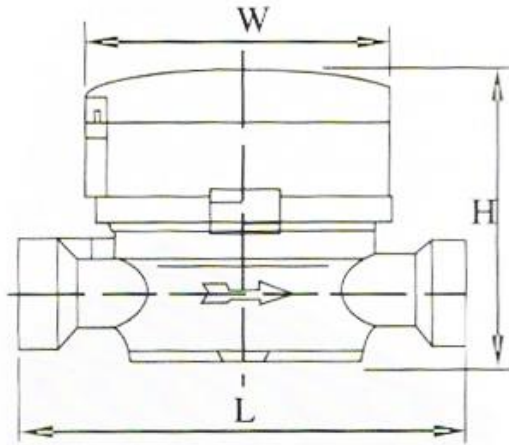

Type	Size (mm)	Length (mm) L	Width (mm) W	Height (mm) H	Connecting Thread D	Weight (Kg)
Single Jet	15	110	77	73	G 3/4 B	0.57
	20	165	77	80	G 1 B	0.67