

Digital Tube Microm. Sph. Anvil/Spindle

0-25mm, IP65

Item number: 395-271-30




Description

This Digimatic Tube Micrometer allows you to measure curved surfaces such as the wall thickness of tubes, bearings and rings. With radius of anvil/spindle faces: carbide R=4 mm.

Features

Range:	0 - 25 mm
Digital step:	0,001 mm
Maximum Permissible Error J MPE:	±2 µm
Anvil / Spindle:	Type B, spherical anvil and spindle SR=4 mm
Measuring force:	5 - 10 N
Mass:	270 g
Display:	LCD, character height 7.5 mm
Measuring face:	Carbide-tipped, micro-lap finish
Measuring spindle:	With spindle lock, ø6,35 mm, spindle pitch 0,5 mm
Scale:	Thimble and sleeve satin chrome finish, ø18 mm
Power supply:	1 battery SR-44
Battery life:	Approx. 2,4 years
Digital/Analog:	Digital
Inch-Metric:	Metric
Measuring spindle:	With spindle lock, ø6,35 mm, spindle pitch 0,5 mm
Battery life:	Approx. 2,4 years
Delivered:	Including box, setting standard (from 25 mm upward), key, 1 battery

Dimensions

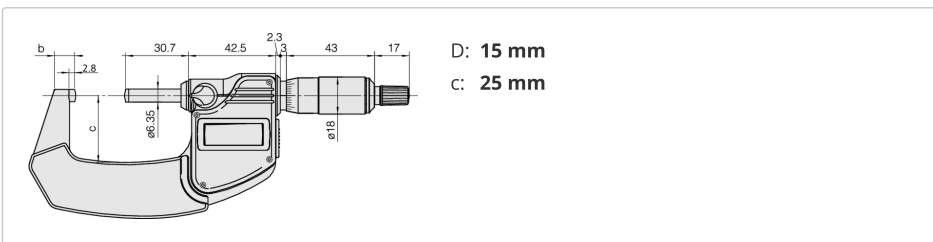

Accessories

Optional accessories:



Digimatic Cable with Data Button IP Type
1m, Micrometer Type
05CZA662
 Suggested retail price: **91.00 €***



Digimatic Cable with Data Button IP Type
2m, Micrometer Type

05CZA663

Suggested retail price: **92.00 €***



USB Input Tool Direct (Digimatic USB)
Digi/Digi2, With Data Button IP Micrometer Type

06AFM380B

Suggested retail price: **122.00 €***



U-WAVE fit, IP67 Type
Wireless Transmitter for Micrometer

264-622

Suggested retail price: **163.00 €***



U-WAVE fit, Buzzer Type
Wireless Transmitter for Micrometer

264-623

Suggested retail price: **163.00 €***



Connection Unit, U-WAVE fit
Waterproof Type

02AZF310

Suggested retail price: **97.00 €***

Spare parts

Consumable spares:



Battery SR44 1.5V
938882